

ITALIGHTING

Wall Washer




Tira LED Wall Washer

SKU: 8405 - 8406


Tira LED Wall Washer

SKU: 8404 - 8405



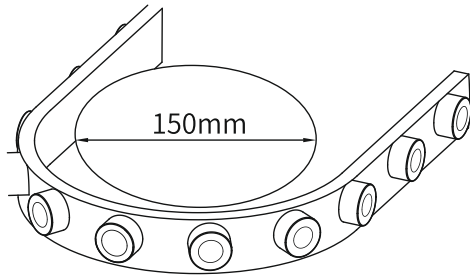


Modelo: SE48JC1
LEDs / m: 48 LEDs
Potencia: 24W
Conector: GU10
IP: 67
CRI: >92
Ángulo: 30° 45° 60° 20* 45°
Dimerizable: Si
Vida útil: 50.000 h
Temp. de trabajo: -25°C ~ +45°C
Medida corte: 125mm

CCT	2700K ±100K	3000K ±100K	4000K ±200K	6500K ±200K
Lumen/m	1851 LM	1915 LM	2167 LM	1949 LM

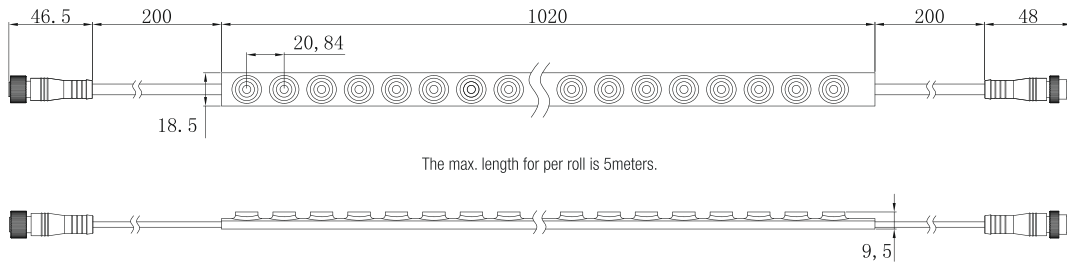

Gráficos y curvas de distribución lumínica

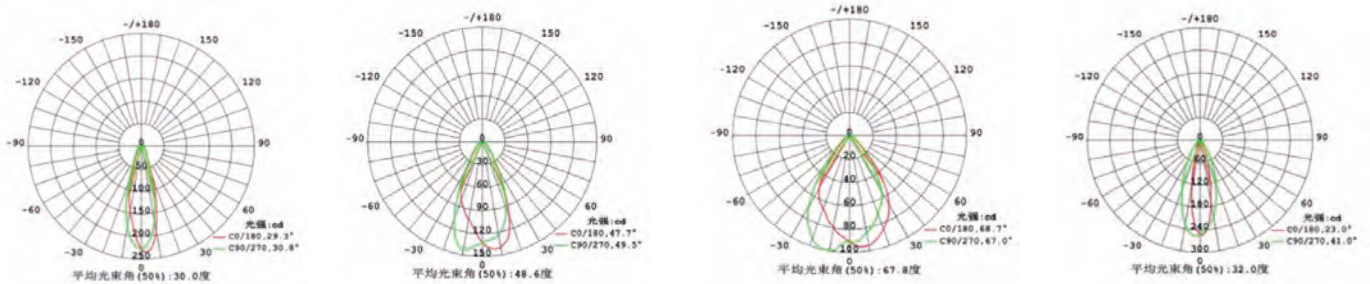

Distancia de instalación / Altura Wall Washing

























Diagrama de instalación


Installation With back tape

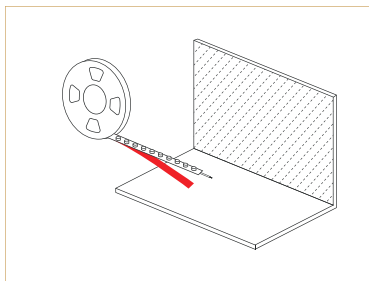

Remove the product from the packaging box and tear off the tape on the back.

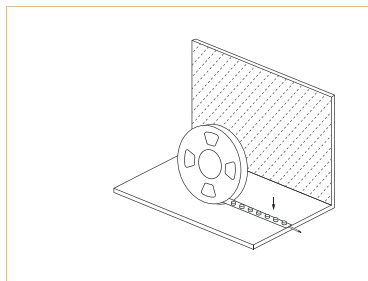


Install the product where you need it (ensure the wall is smooth), refer to the installation distance diagram for the specific glowing effect, and stick it firmly.

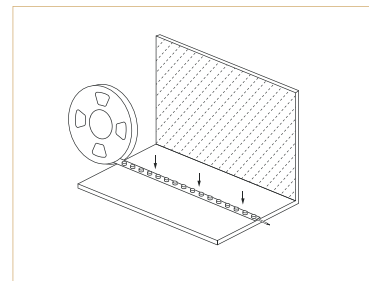


Connect the product to the low-voltage driver and energize it.


Installation with stainless steel mounting clip

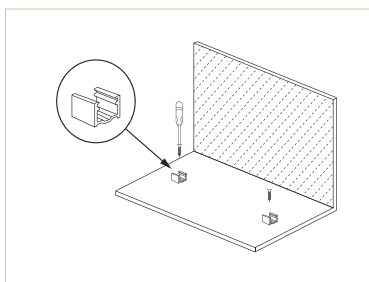

Remove the stainless steel mounting clips and screws from the packing box, and use a screwdriver to install these clips where needed.

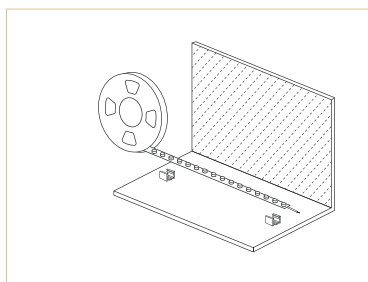


Take the light out of the box, then put the light into the clips and secured it (refer to the installation distance diagram for the specific glowing effect).

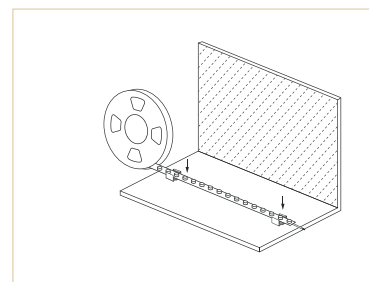


Connect the product to the low-voltage driver and energize it.


Installation with Silicone Mounting Clip

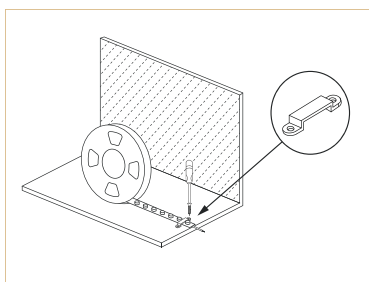

Place the light where needed, and refer to the installation distance diagram for the specific glowing effect.

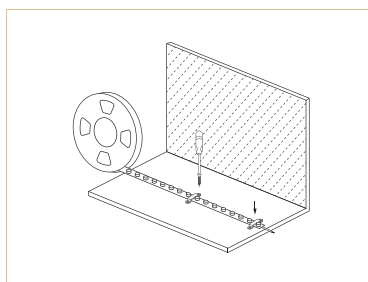


Remove the silicone mounting clips and screws from the package box, and fix these clips with a screwdriver.

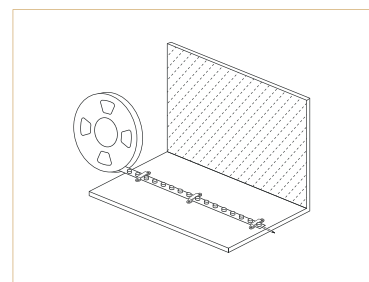


Connect the product to the low-voltage driver and energize it.

Distancia de instalación / Altura Wall Washing


Installation with Aluminum Profile

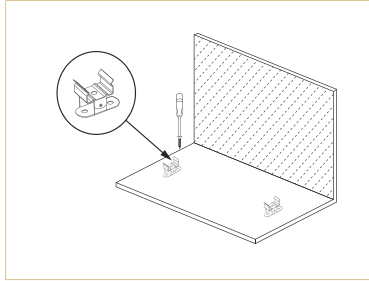

Remove the light, aluminum profile and rotating brackets from the box, and fix the rotating brackets to the needed position with a screwdriver.

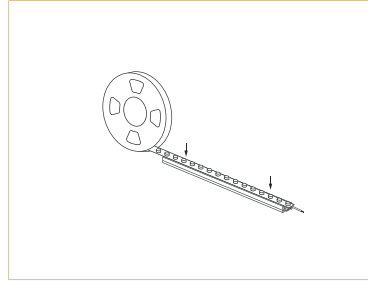


Put the light into the aluminum profile, and press the light down along the profile to ensure the light is tightly stuck into it. Then fasten the profile on the rotating brackets (according to the glowing angle requirements, the rotating bracket can be adjusted).

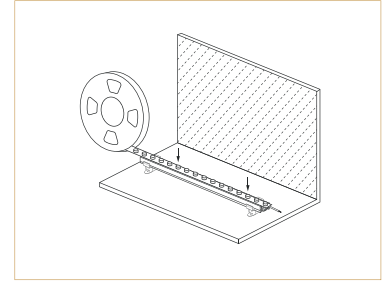

The specific glowing effect can be adjusted according to the needs of the application. After the installation, connect the light to the low-voltage driver and energize it.

Diagrama de cableado

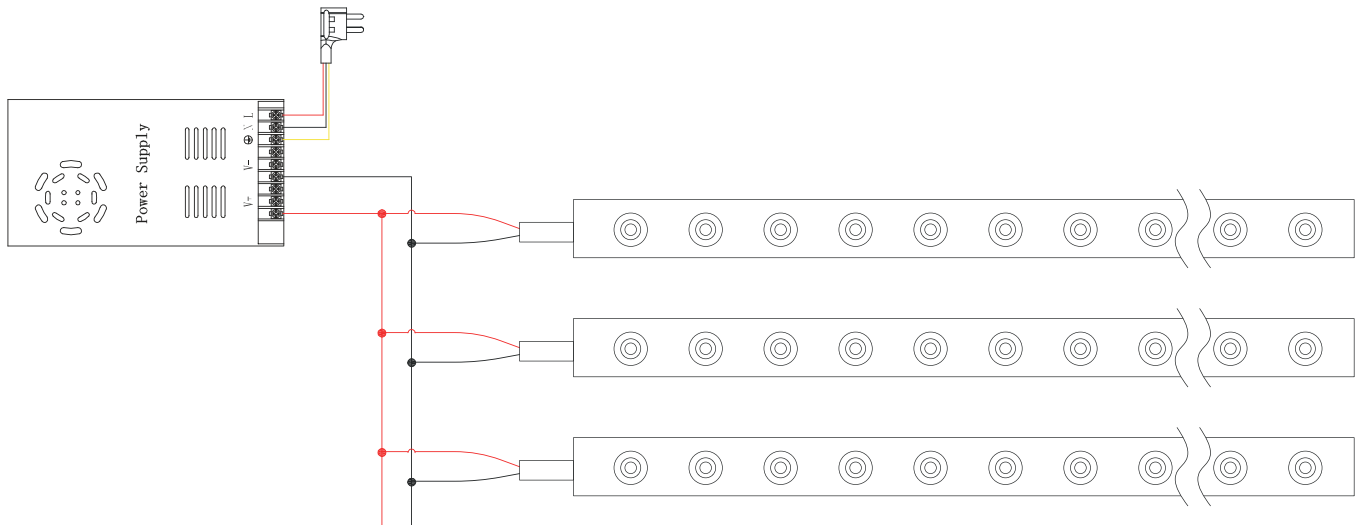

Accesorios



Stainless Steel Mounting Clips



3M Tape



Plastic Holding Clips




Aluminum Profile


Precauciones




Modo correcto

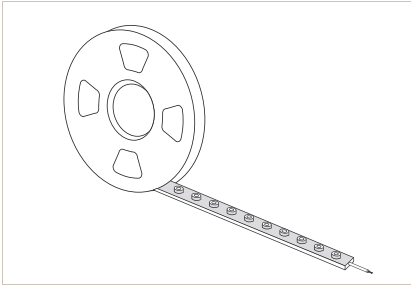

During the installation process, the LED wall washer is taken out from the reel naturally and keep it as straight as possible.

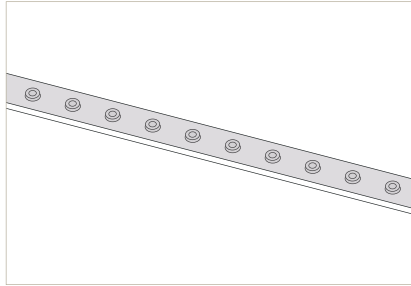


The LED wall washer should be kept vertical or horizontal during the installation process.

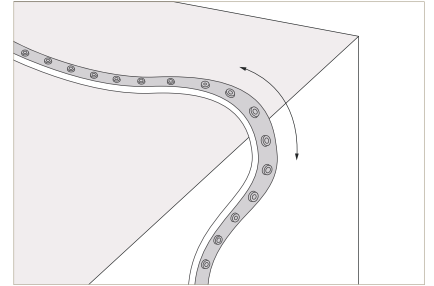


When LED wall washer meets the corner during the installation process, the LED wall washer must be kept facing up and the back facing down, maintaining a certain bending arc, $\Phi \geq 150\text{mm}$.


Modo incorrecto

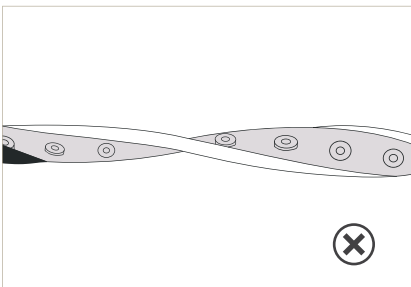

Do not twist the LED wall washer during the installation process.

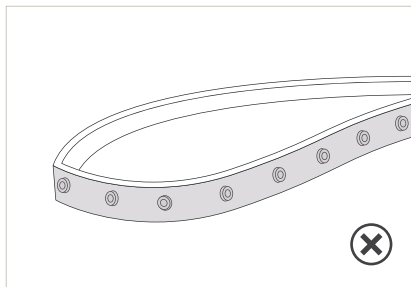

Do not fold the LED wall washer in half or bend it at a small angle during the installation.

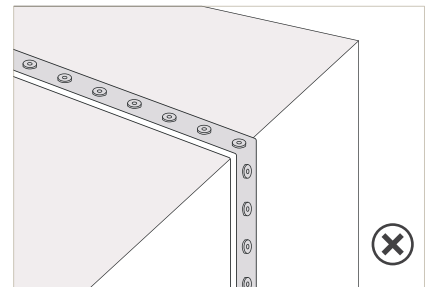

When the LED wall washer meets the corner during the installation process, the LED wall washer must be kept facing up and the back down, and it cannot be bent at right angles.

Aplicaciones

